

Key Features

- 19 " 2U Benchtop
- Broadband ASE Spectrum
- Output power: 250mW to 1W
- 20dB Bandwidth >160nm
- Customized center wavelength from 1800 to 1900nm
- Diffraction limited beam
- Standard or PM fiber version
- Output isolator
- USB Interface
- Operation Temp: 10 to 35°C


The **CYBEL MIR-ASE-BT-1900** is a fiber mid infrared (MIR) broadband light source. This amplified stimulated emission (ASE) source exhibits an excellent power stability, low temporal coherence and a high spatial coherence. These combined features are ideal for applications ranging from optical component testing, gas analysis to Optical coherence tomography (OCT).

The **MIR-ASE-BT-1900** comes in a 19" turn-key rack mountable benchtop version with either a random or linear polarized output signal. The unit delivers an output power of 250mW up to 1W with a 20dB band of 160nm.

The **MIR-ASE-BT-1900** can be designed to have its centered emission wavelength selected from 1800nm to 1900nm. Its output power is scalable to Watt level with an optical isolator.

Applications

- Optical component testing
- Gas spectrum analysis
- Spectroscopy
- Bio-medical analysis

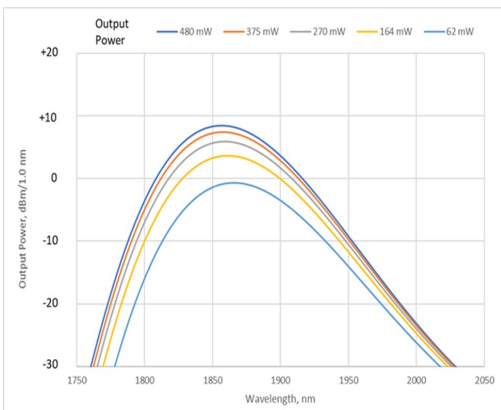

Other ASE Sources

- ◆ MIR-ASE-BT-1900
- ◆ MIR-ASE-2000
- ◆ MIR-ASE-BT-2000

Turn-Key Rack Mount Benchtop

MIR-ASE-BT-1900 Specifications

OPTICAL	Unit	Value	Comment
Center wavelength	nm	1900	Other wavelengths available
Output power (CW)	mW	250	Scalable; High power available>1W
Bandwidth (-20dB)	nm	160	Typical
Beam quality (M ²)	M ²	<1.1	
Polarization Ext. Ratio	dB	≥ 20	PM version
Output fiber stability	%	<1	30dB output isolator @25C
Pigtail Output fiber		SM 1950 or PM1950	Panda fiber or optional armored cable
Output Fiber length	m	1	Output connector; FC/APC
Output power Tuning range	%	10 to 100%	
ELECTRICAL/MECHANICAL			
Dimensions	inch	19 " -2U	Rack mount front panel control or USB computer interface
Supply power consumption	W	25	25 °C, 400mW output power
Storage Temperature	°C	-20 to 65	
Operating temperature	°C	10 to 35	With heat sink and forced air
Operating relative humidity	%	5 to 95	Non-condensing

CUSTOMIZATION

The **MIR-ASE-BT-1900** is a laser platform that can be customized to match Customers' specific requirements. Please contact Cybel.

COMPLIANCE with Regulatory Requirements: These Benchtop products are Class 4 lasers as designated by the Center for Device and Radiology Health (CDRH). As such they are intended only in integration into other equipment and do not comply with CDRH requirement. It is the customer responsibility for CDRH certification of the full system that incorporates this industrial laser.



1195 Pennsylvania Ave
Bethlehem, PA 18018
Phone: 610-691-7012

Sales: contact@cybel-llc.com

Website: www.cybel-llc.com