


# 1392nm DM LASER

EP1392-DM-B




**eblana**photonics

**Cybel, LLC.** North American Distributor

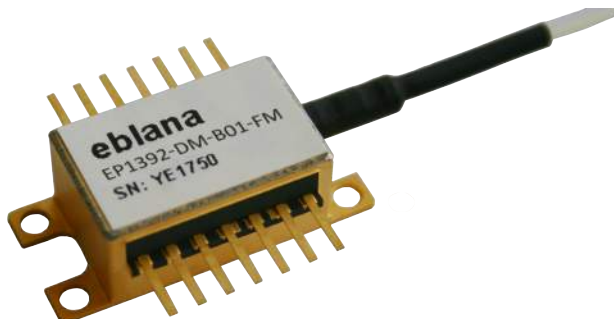


## PRECISION MOISTURE SENSING

Eblana Photonics EP1392-DM-B laser diode, available at a range of wavelengths from 1385 - 1400nm, is designed specifically for detection of H<sub>2</sub>O. Eblana's Discrete-Mode (DM) technology enables the design of a cost effective device with mode-hop free tunability and excellent SMSR.

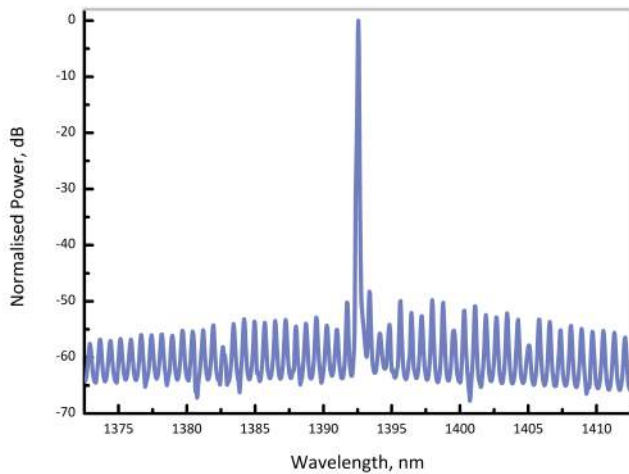

Optical Spectrum at 25°C

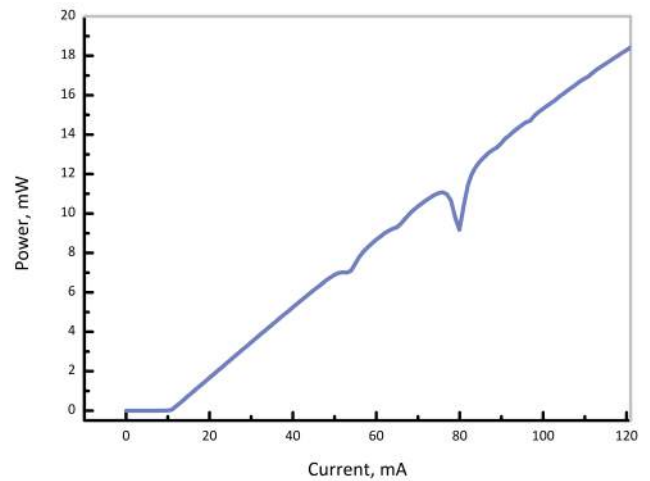

Output power vs current, showing H<sub>2</sub>O absorption feature.

## ELECTRO-OPTICAL CHARACTERISTICS\* (T<sub>SUB</sub> = 25° C)

PARAMETER	SYMBOL	MIN	TYP	MAX	UNIT
Available Wavelength Range	$\lambda$	1385	1392.5	1400	nm
Wavelength Tolerance	$\lambda_{spec}$	$\lambda - 1$	$\lambda$	$\lambda + 1$	nm
Side Mode Supression Ratio	SMSR	30	40	-	dB
Threshold Current	$I_{th}$	-	15	20	mA
Output Power in fiber	$P_f$	5	8	12	mW
Optical linewidth	$\Delta f$	-	-	2	MHz
Temperature Tuning Coefficient	$T_\lambda$	0.07	0.1	-	nm/°C
Current Tuning Coefficient	$I_\lambda$	8	10	-	pm/mA
Slope Efficiency	SE	0.1	0.15	-	mW/mA
Thermistor Resistance	$R_T$	9.5	10	10.5	k $\Omega$
Thermistor Temp. Coefficient	C	-	-4.4	-	%/°C

\*CW bias unless otherwise stated


# ABSOLUTE MAXIMUM RATINGS

PARAMETER	SYMBOL	MIN	MAX	UNIT
Forward Current	$I_f$	-	120	mA
Forward Voltage	$V_f$	-	2	V
TEC Current	$I_{TEC}$	-	1.2	A
Reverse Voltage LD	$V_r$	-	2	V
Reverse Voltage PD	$V_{rev}$	-	20	V
Case Temperature*	$T_{Case}$	-20	65	°C
Chip Submount Temperature	$T_{Sub}$	0	50	°C
Storage Temperature	$T_{storage}$	-40	85	°C


\*For  $T_{sub} < 25^{\circ}C$ , Max Case Temperature should be derated to  $T_{Case,Max} = T_{sub} + 40^{\circ}C$

## PACKAGING

The EP1392-DM-B product series is offered in a 14-pin Butterfly package - Inquire for other packaging options. The standard package pinout is shown below, variations may be requested.

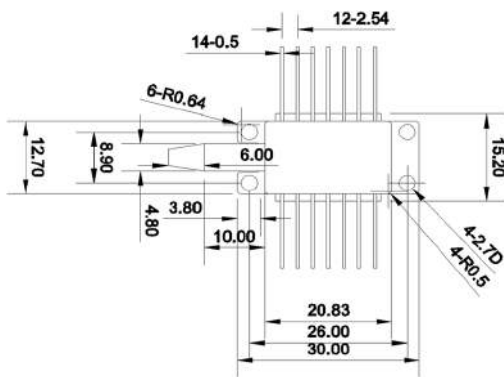


14-pin butterfly schematic

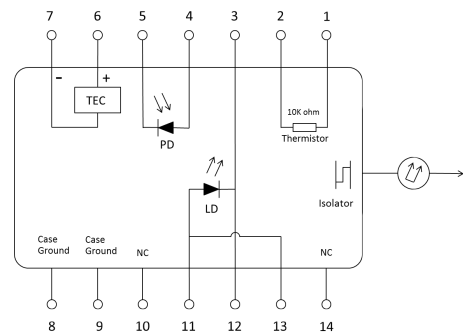

Standard "Pinout 01" option

## HOW TO ORDER

Construct your part number using the following example and email your order to [contact@cybel-llc.com](mailto:contact@cybel-llc.com), or call 610-691-7012.

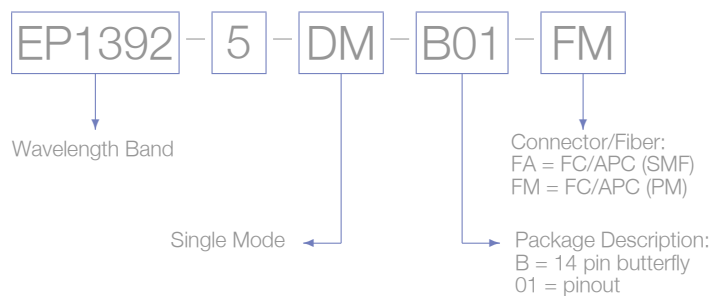

### Laser Safety

This is a Class 3R Laser Product as defined by International Standard IEC 60825-1, Edition 2. Invisible Laser radiation is emitted from the end of the fiber or connector. Avoid direct eye exposure to the beam. Laser safety labels are not attached to the module due to space limitations but instead are affixed to the outside of the shipping carton.

©Eblana Photonics 2015. Eblana Photonics Reserves the right to amend this document at any time, without prior warning. ©Eblana Photonics Series 1392-DM-B Rev 2.02