

ARCTIC-1064 Self-Heterodyne System

Key Features

- Bandwidth from 1000-1100nm
- Pin < 200 mW
- Linewidth > 500kHz
- CW Operation
- Pulsed mode operation for selected *f*/τ combinations
- All-PM Fiber
- Operation Temp: 15 to 35°C
- Efficient cooling system
- Built-in balanced receiver

The **CYBEL ARCTIC-1064** is a benchtop self-heterodyne system, that allows the linewidth measurement of lasers operating at wavelengths between 1000-1100nm in CW or pulsed mode for selected frequency and pulse length combinations. The self-heterodyne signal is recorded by a balanced receiver allowing measurement linewidth.

The system is a highly reliable all-fiber design with a simple user interface for controlling input power and capable of reliably measuring the linewidth within the range of 0.5-50MHz.

The **ARCTIC-1064** system comes in a 19 " 2U rack mount benchtop unit in all polarization maintaining (PM) fiber. Benchtop control is done from the front panel.



Applications


• Laser Linewidth measurement

LIGHTING THE WAY

• Heterodyne of two signals

Cybel Products

• ARCTIC-1550

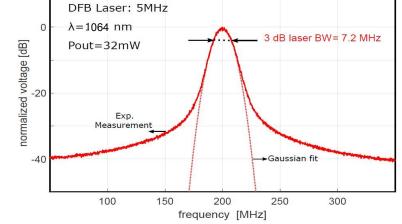


5MHz Linewidth DFB Measurement

1195 Pennsylvania Ave. Bethlehem, PA 18018 Phone: 610-691-7012 Sales: contact@cybel-llc.com

Website: www.cybel-llc.com

ARCTIC-1064 Self-Heterodyne System

OPTICAL	Unit	Value	Comment
Center wavelength	nm	1064	
Input power	mW	200	Scalable ; High power available
Spectral width	kHz	>500	With 4 Km delay fiber
Fiber Type		PM Fiber	
Fiber delay length	km	3	FC/APC connector, up to 10km of delay fiber can be used.
ELECTRICAL/MECHANICAL			
Voltage	V	90-264	
Warm-up time	min	20	
Mechanical package	inch	19 "	2U-Rack mount Benchtop
Supply power consumption	W	20	
Connector		BNC	
ENVIRONMENTAL			
Operating temperature	°C	15 to 35	
Operating relative humidity	%	5 to 95	Non-condensing

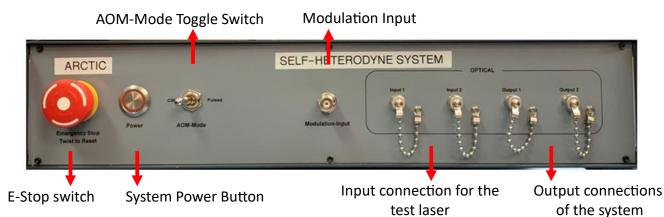

CUSTOMIZATION

The **ARCTIC-1550** is a self-heterodyne platform that can be customized to match Customers ' specific requirements. Please contact Cybel.

COMPLIANCE with Regulatory Requirements: These BENCHTOP products are Class 4 lasers as designated by the Center for Device and Radiology Health (CDRH). As such they are intended only in integration into other equipment and do not comply with CDRH requirement. It is the customer responsibility for CDRH certification of the full system that incorporates this industrial laser.





1195 Pennsylvania Ave Bethlehem, PA 18018 Phone: 610-691-7012 Sales: contact@cybel-llc.com

Website: www.cybel-llc.com