

QDLASER

QLD1062

1053 nm DFB Laser Butterfly Package

Preliminary

C000xx-01 Oct. 2010



1. DESCRIPTION

The QLD1062 is a 1053-nm distributed feedback (DFB) laser butterfly package

2. FEATURES

- Single longitudinal mode operation at 1053nm
- Fiber-pigtailed 14-pin butterfly package with a TEC
- Optical isolator integration
- Polarization maintaining fiber integration
- CW/Pulse operation

3. APPLICATION

- Seed laser for fiber lasers
- Aerospace
- Sensing

4. ABSOLUTE MAXIMUM RATING

PARAMETER	SYMBOL	RATING	UNIT
Fiber Output Power	P_O	30	mW
LD Forward Current	I_F	180	mA
LD Reverse Voltage	V_{RLD}	2	V
TEC Drive Current	I_{TEC}	2	A
TEC Drive Voltage	V_{TEC}	4.3	V
Operation Temperature (T_c)	T_c	0 to 60	°C
Storage Temperature	T_{stg}	-40 to 85	°C
Lead Soldering Temperature (5 s)	T_{sld}	230	°C

QDLASER

QLD1062


5. OPTICAL AND ELECTRICAL CHARACTERISTICS

($T_{LD} = 25^{\circ}\text{C}$, unless otherwise specified)

PARAMETER	SYMBOL	TEST CONDITION	MIN	TYP	MAX	UNIT
Peak Wavelength	λ_p	CW, $P_f=20\text{ mW}$	1048	1053	1058	nm
Spectral Width (FWHM)	$\Delta\nu$	CW, $P_f=20\text{mW}$	-	2	20	MHz
Temperature Coefficient of λ_p	$d\lambda_p/dT$	CW	-	0.1	-	nm/K
Current Coefficient of λ_p	$d\lambda_p/dI$	CW	-	0.01	-	nm/mA
Fiber Output Power	P_f	CW	20	-	-	mW
Threshold Current	I_{th}	CW	-	20	-	mA
Operation Current	I_{op}	CW, $P_f=20\text{mW}$	-	100	150	mA
Operation Voltage	V_{op}	CW, $P_f=20\text{ mW}$	-	1.5	2.0	V
Sidemode Suppression Ratio	SMSR	CW, $P_f=20\text{ mW}$	-	40	-	dB
Polarization Extinction Ratio	PER	CW, $P_f=20\text{mW}$	15	20		dB
Monitor PD Current	I_m	CW, $P_f=20\text{mW}$	50	100	500	μA
Thermistor Resistance	R_{th}	$T_{LD} = 25^{\circ}\text{C}$, $B=3900\text{K}$	9.5	10	10.5	$\text{k}\Omega$

6. PIN CONFIGURATION

No.	Description	No.	Description
1	TEC (+)	8	NC
2	Thermistor	9	NC
3	PD Anode	10	Laser Anode
4	PD Cathode	11	Laser Cathode
5	Thermistor	12	NC
6	NC	13	Case Ground
7	NC	14	TEC (-)

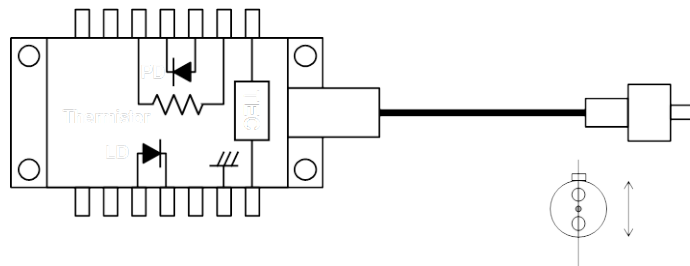

QD Laser, Inc.

Contact : sales@qdlaser.com <http://www.qdlaser.com>

Copyright 2010 All Reserved by QD Laser, Inc.

Keihin Bldg. 1F 1-1 Minamiwatarida-cho, Kawasaki-ku, Kawasaki, Kanagawa Zip 210-0855 Japan

All company or product names mentioned herein are trademarks or registered trademarks of their respective owners. Information provided in this document is accurate at time of publication and is subject to change without advance notice.