

# QDLASER

## QLD1061-AD

1047 nm DFB Laser Butterfly Package

Preliminary

C00045-01 Nov. 2010



### 1. DESCRIPTION

The QLD1061-AD is a 1047-nm distributed feedback (DFB) laser butterfly package

### 2. FEATURES

- Single longitudinal mode operation at 1047nm
- Fiber-pigtailed 14-pin butterfly package with a TEC
- Optical isolator integration
- Polarization maintaining fiber integration
- CW/Pulse operation

### 3. APPLICATION

- Seed laser for fiber lasers
- Aerospace
- Sensing

### 4. ABSOLUTE MAXIMUM RATING

PARAMETER	SYMBOL	RATING	UNIT
Fiber Output Power	$P_O$	15	mW
LD Forward Current	$I_F$	180	mA
LD Reverse Voltage	$V_{RLD}$	2	V
TEC Drive Current	$I_{TEC}$	2	A
TEC Drive Voltage	$V_{TEC}$	4.3	V
Operation Temperature ( $T_c$ )	$T_c$	0 to 60	°C
Storage Temperature	$T_{stg}$	-40 to 85	°C
Lead Soldering Temperature (5 s)	$T_{sld}$	230	°C

# QDLASER

QLD1061-AD


## 5. OPTICAL AND ELECTRICAL CHARACTERISTICS

( $T_{LD} = 25^{\circ}\text{C}$ , unless otherwise specified)

PARAMETER	SYMBOL	TEST CONDITION	MIN	TYP	MAX	UNIT
Peak Wavelength	$\lambda_p$	CW, $P_f=10\text{ mW}$	1042	1047	1052	nm
Spectral Width (FWHM)	$\Delta\nu$	CW, $P_f=10\text{mW}$	-	5	20	MHz
Temperature Coefficient of $\lambda_p$	$d\lambda_p/dT$	CW	-	0.1	-	nm/K
Current Coefficient of $\lambda_p$	$d\lambda_p/dI$	CW	-	0.02	-	nm/mA
Fiber Output Power	$P_f$	CW	10	-	-	mW
Threshold Current	$I_{th}$	CW	-	20	-	mA
Operation Current	$I_{op}$	CW, $P_f=10\text{mW}$	-	100	180	mA
Operation Voltage	$V_{op}$	CW, $P_f=10\text{ mW}$	-	1.6	2.0	V
Sidemode Suppression Ratio	SMSR	CW, $P_f=10\text{ mW}$	-	40	-	dB
Polarization Extinction Ratio	PER	CW, $P_f=10\text{mW}$	15	20		dB
Monitor PD Current	$I_m$	CW, $P_f=10\text{mW}$		100		$\mu\text{A}$
Thermistor Resistance	$R_{th}$	$T_{LD} = 25^{\circ}\text{C}$ , $B=3900\text{K}$	9.5	10	10.5	$\text{k}\Omega$

## 6. PIN CONFIGURATION

No.	Description	No.	Description
1	TEC (+)	8	NC
2	Thermistor	9	NC
3	PD Anode	10	Laser Anode
4	PD Cathode	11	Laser Cathode
5	Thermistor	12	NC
6	NC	13	Case Ground
7	NC	14	TEC (-)

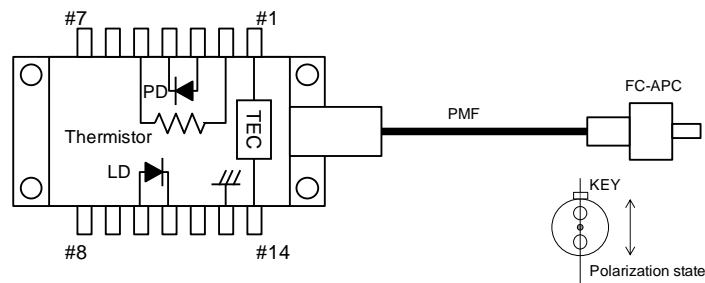

QD Laser, Inc.

Contact : [info@qdlaser.com](mailto:info@qdlaser.com) <http://www.qdlaser.com>

Copyright 2010 All Rights Reserved by QD Laser Inc.

Address : Keihin Bldg.1F 1-1 Minamiwataridacho, Kawasaki-ku, Kawasaki, Kanagawa Zip 210-0855 Japan

All company or product names mentioned herein are trademarks or registered trademarks of their respective owners. Information provided in this data sheet is accurate at time of publication and is subject to change without advance notice.